


	Length	Width (Depth)	Height
<b>Bleacher Dimensions</b>	<b>39ft</b>	<b>17ft 9in</b>	<b>7ft 5in (Top Seat)</b>
<b>Towing Dimensions</b>	<b>46ft 9in (with hitch)</b>	<b>8ft</b>	<b>12ft 5in</b>

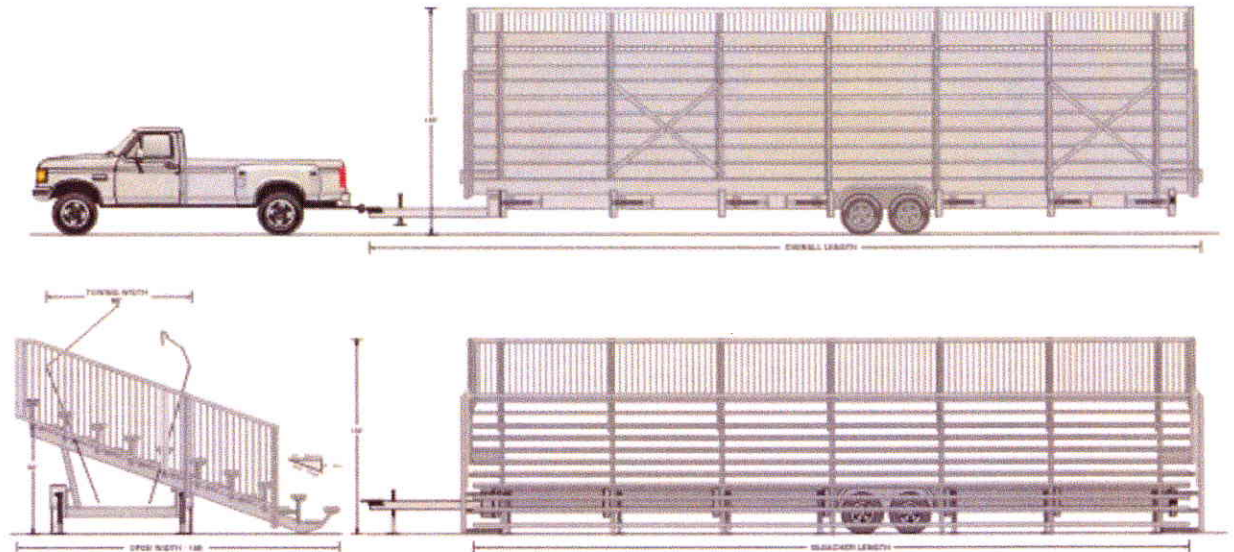

<b>Seat Rows</b>	10
<b>Row Length</b>	39 ft
<b>Seating Capacity</b>	260 seats - @18" per seat
<b>Frame</b>	12" rolled steel channel backbone frame
<b>Finish</b>	Hot dipped galvanizing after fabrication
<b>Seat &amp; Foot Boards</b>	2"x10" nominal anodized extruded aluminum
<b>Guardrails</b>	Welded steel with vertical balusters, galvanized finish
<b>Hitch</b>	Pintle ring (Ball coupler available)
<b>Suspension</b>	14,000lb tandem axle
<b>Brakes</b>	(4) wheel electric
<b>Tires</b>	LT215/85R16, 6 ply, load range D highway rated tires
<b>Towing electrical</b>	ICC road and signal lights, license bracket and light, 12VDC cable and connector
<b>Tongue Jack</b>	7,000lb crank jack
<b>Leveling Jacks</b>	(14) frame mounted 7,000lb swivel jacks, pivot for maximum ground clearance
<b>Power Actuator</b>	12VDC deep cycle battery & charger
<b>Hardware</b>	Self-contained hydraulic system
<b>Weight</b>	Galvanized steel and stainless steel nuts and bolts 7,960 lbs